



Leveling screws (galvanized)

incl. 2 nuts + 2 washers (VA)




The size of the screws depends upon the size of the hole in the machine foot!

Ø																			
Length in mm	M 10	70	M 12	70	M 16	100	M 18	100	M 20	100	M 24	150							
		100		100		125		125		125		200							
				125		150		150		150		250							
				150		200		200		200		300							
						250		250		250		300							
								300		300									

Horizontal elements

Size 1, consisting of: steel angle, leveling element type BNV 115/5, 3 screws M 16x150, 2 patented plugs M 16

Size 2, consisting of: steel angle, leveling element type BNV 115/5, 3 screws M 20x150, 3 patented plugs M 20

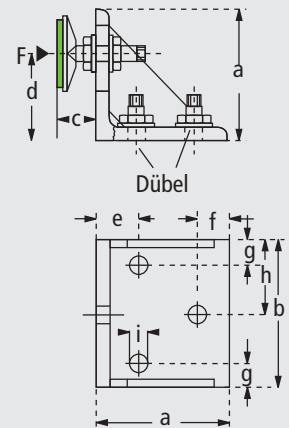

Dimensions mm	Size 1	a	140	b	125	c	45	d min.	60	d max.	115	e	50	f	25	g	35	h	∠	i	17,5	F in daN	1500
	Size 2		160		180		55		60		140		50		40		35		90		22	F in daN	2500

Insulating disks for screws head insulation

(bolt-through version)



Isolation of structure-borne noise for deep-seated machines and pipe suspensions.

for screws Ø	up to M 12	outside Ø mm	35	hole Ø mm	13	mounting height mm	20	max. prestress force daN	200
	up to M 20		50		21		21		300
	up to M 30		70		31		25		450

Anchor recommendation:

Heavy duty anchor SL
Fischer anchor R + threaded rod RG
Fischer anchor bolt FAZ

